

&KUROLOK™
ZIPPED-EDGE BLACKOUT





ZIPPED-EDGE BLACKOUT

With the ability to cover an incredible 24m² in a single blind, KuroLok is an outstanding performer for your shading requirements.

OVERVIEW

- Zipped-edge fabric retention
- 12 year warranty
- Sizes up to 4m wide, 6m drop, 24m²
- Includes headbox and slim side channels

SYSTEM DETAILS

KuroLok features extruded aluminium headbox and slim side channels. The blind fabric is locked into the side channels using zip technology. The aluminium profiles are powder coated in white or black as standard, or any other RAL colour to order.

Universal profiles allow the frame to be fixed through the face, sides or top as required and all fixings are completely concealed.

USES & APPLICATIONS

Zipped-edge fabric retention removes the challenge, and associated maintenance issues, of fabric coming out of the side channels on traditional blackout and cassetted blinds.

The fabric being fully retained down both sides also allows for blinds to be installed at up to 30° off the vertical and still function perfectly; an ideal solution for sloping glazing.

The headbox and side channels can also be recessed into walls or ceilings for the ultimate built-in look. KuroLok blinds are simple and fast to install and are robustly built to provide a maintenance-free blind. Using the same controls as our Helios system, KuroLok can be motorised or operated manually via chain or crank handle.






SIDE CHANNELS WITH FABRIC ZIP

- Standard 35mm wide channel
- Zipped edge fabric retention
- Slimmer 24mm and Wider 56mm channel also available
- Available in RAL 9016 White and RAL 9005 Black as standard.



HEADBOX TO SUIT BLIND SIZE

- 80mm (H) x 80mm (D), 100mm (H) x 92.5mm (D) or 125mm (H) x 117.5mm (D)
- Connects to side channels with sturdy steel legs
- Strong 'Goalpost' frame for fast install

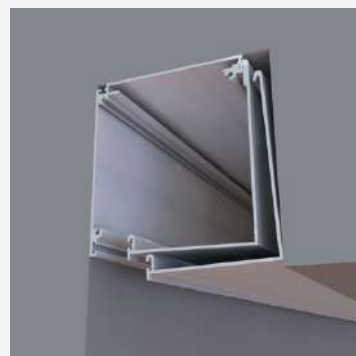


FASCIA REMOVABLE WITHIN 80MM, 100MM OR 125MM

- Enables fitting within slim recess
- Ideal for install within ceiling pocket
- Blinds can be accessed for maintenance

CONTROL OPTIONS

- Crank-handle with reduction gear
- 240V motorised
- Low voltage or battery motorised





MOTORISATION CONTROLS

- Hardwired Switch
- Radio remote control
- Digital and IP communication
- Integration and control systems






FABRIC OPTIONS


- Blackout fabrics for room darkening
- Dimout fabrics for light filtering and privacy
- Sunscreen fabrics for glare control with views out

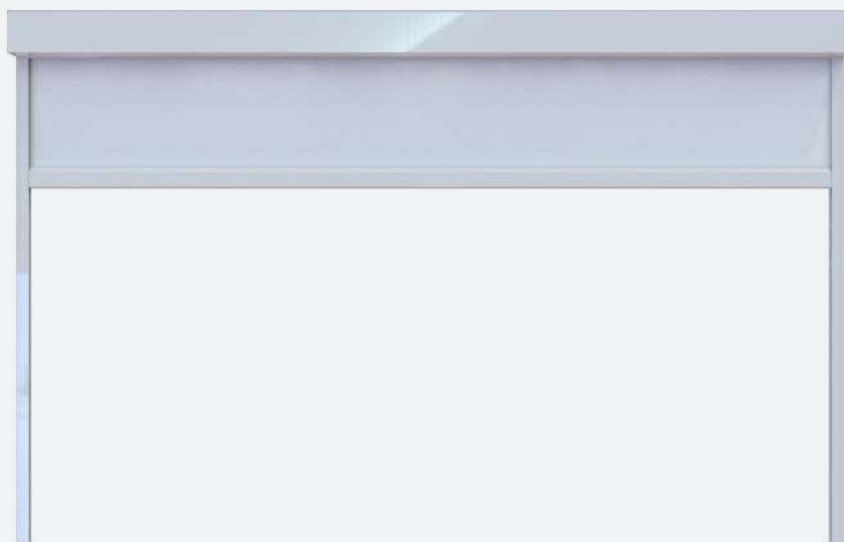

KUROLÖK HEADBOX DIMENSIONS

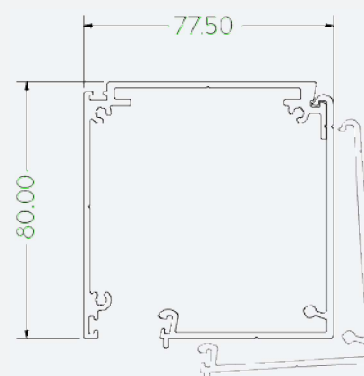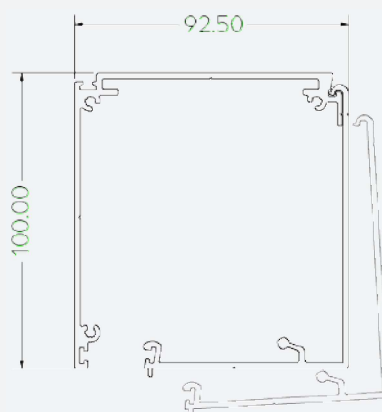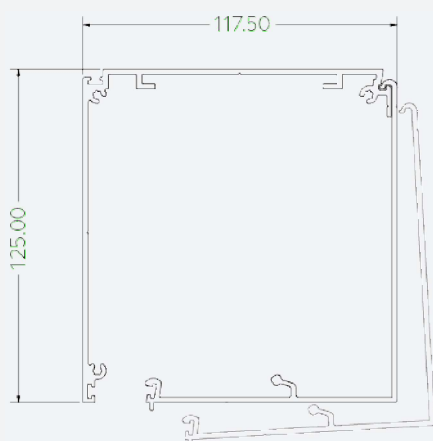

FABRIC RETENTION SIDE CHANNELS

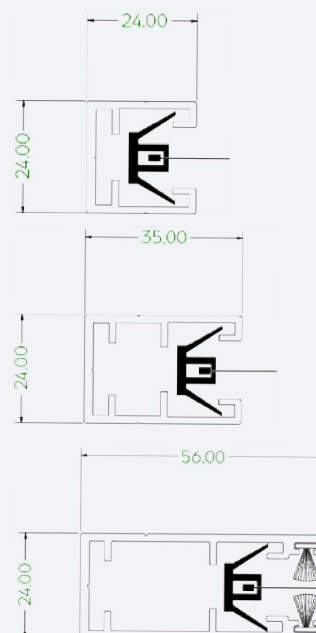

SELECT YOUR SYSTEM


See Systems Overview brochure for more information

ROOFLIGHT SYSTEMS

BLACKOUT SYSTEMS

SQUARE AREA

18m²



® KUROLOK™
TWIN RL

9m²



® KUROLOK™
RL

4m²



® HELIOS™
RL

24m²



® KUROLOK™

BLACKOUT SYSTEMS

ROLLER SHADES

14m²



® KURO™

LARGE

16m²



® HELIOS™

MEDIUM

6m²



® SIRIOS™

SMALL

3m²



® ORBIS™