

Saxon Blinds Ltd

Specifications

40mm System

Drive End Features:

- Tensile spring loading mechanism manufactured in stainless steel.
- Operated with plastic or nickel N° 10 chain
- Internal mechanisms are coated with tailored lubricant ensuring smooth and quiet operation.
- 3 pin secure fitting clicks securely into bracket.
- Floating outer cover enables chain to be fitted without dismantling the clutch

Bracket Features:

- Load Capacity 2.75Kg
- Powder coated for rust resistance.
- Plastic cover caps available to finish blinds when fitted outside the recess.
- Extended base bracket aids installation while keeping slim profile shape.
- Extension brackets available – projection dimension 86mm
- Dual roller bracket available enabling two roller blinds to be installed on the same bracket.

Free End:


- Spring loaded plunge pin design offers flexibility when installing blinds.

Roller Tube:

- High Quality extruded aluminium 40mm double slot tubing with keyed fitting of the drive and free ends

Optional Control Options:

- Somfy Sonesse 30 RTS Rechargeable Battery Motor (Remote Control and App)
- Somfy Sonesse Zigbee 30 Rechargeable Battery Motor (Remote Control and App)

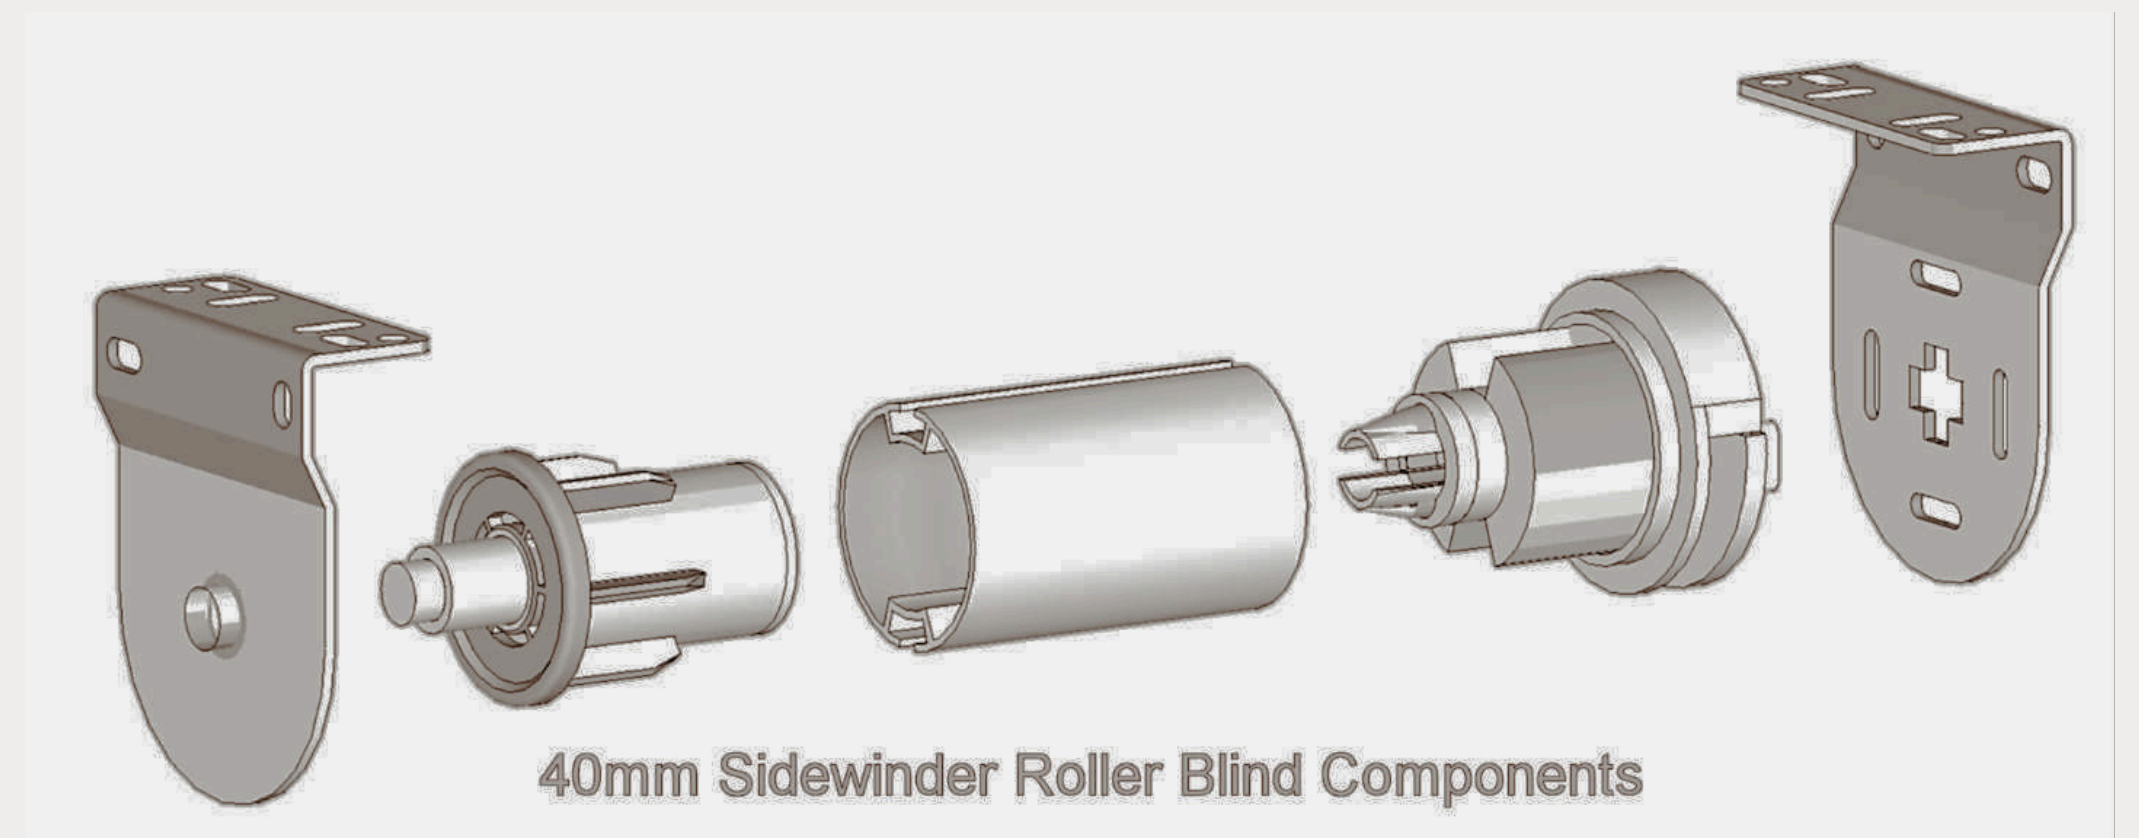

45mm System

Drive End Features:

- Tensile spring loading mechanism manufactured in stainless steel.
- Operated with nickel N° 10 chain
- Internal mechanisms are coated with tailored lubricant ensuring smooth and quiet operation.
- 3 pin secure fitting clicks securely into bracket.
- Floating outer cover enables chain to be fitted without dismantling the clutch

Bracket Features:

- Load Capacity 4.0Kg
- Powder coated for rust resistance.
- Plastic cover caps available to finish blinds when fitted outside the recess.
- Extended base bracket aids installation while keeping slim profile shape.
- Dual roller bracket available enabling two roller blinds to be installed on the same bracket.

Free End:

- Spring loaded plunge pin design offers flexibility when installing blinds.

Roller Tube:

- High Quality extruded aluminium 45mm triple slot tubing.

Optional Control Options:

- Somfy Sonesse 30 RTS Rechargeable Battery Motor (Remote Control and App)
- Somfy Sonesse Zigbee 30 Rechargeable Battery Motor (Remote Control and App)
- Geiger 4:1 Ratio Gearbox Operation with Crank Winding Handle

